

**APPLICATIONS**

- ANALOG & DIGITAL VIDEO
- RGB(S, H/V) COMPONENT VIDEO
- VIDEO WALLS
- HI-RES PROJECTORS
- CG / CAD WORKSTATIONS



**VS • 75Ω COMPONENT VIDEO FANTAILS**

Canare 75Ω VS component cable is available in a variety of pre-cut lengths terminated with our true 75Ω BNC crimp plugs. All assemblies are precisely timed with less than 2.2 nanoseconds between adjacent video channels. Canare VS fantails offer extra wide video bandwidth performance because cable and connectors are 75Ω impedance matched.

Custom assembly configurations can be special ordered using any of Canare's other V-Series models: **V-1.5C, V-3C, V-5C, V-3CFB, V-4CFB** and **V-5CFB** multichannel video snake series in a variety of metric lengths.

**FEATURES**

- Canare true 75Ω BCP-C Crimp Plugs**
- < 2.2 nanoseconds channel delay**
- Super Flexible, easy payout & wrap-up**
- Bundled Cables keep work site neat**
- 100% Test and Quality Controlled**
- Excellent Connector Pull Strength**
- Color Matching BNC Strain Relief Boots**
- Jacket Protection Sleeve at Fan Breakout**
- Wide Selection of V-Series Cable Types**

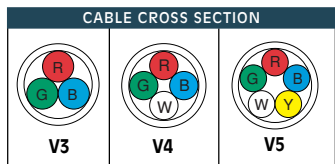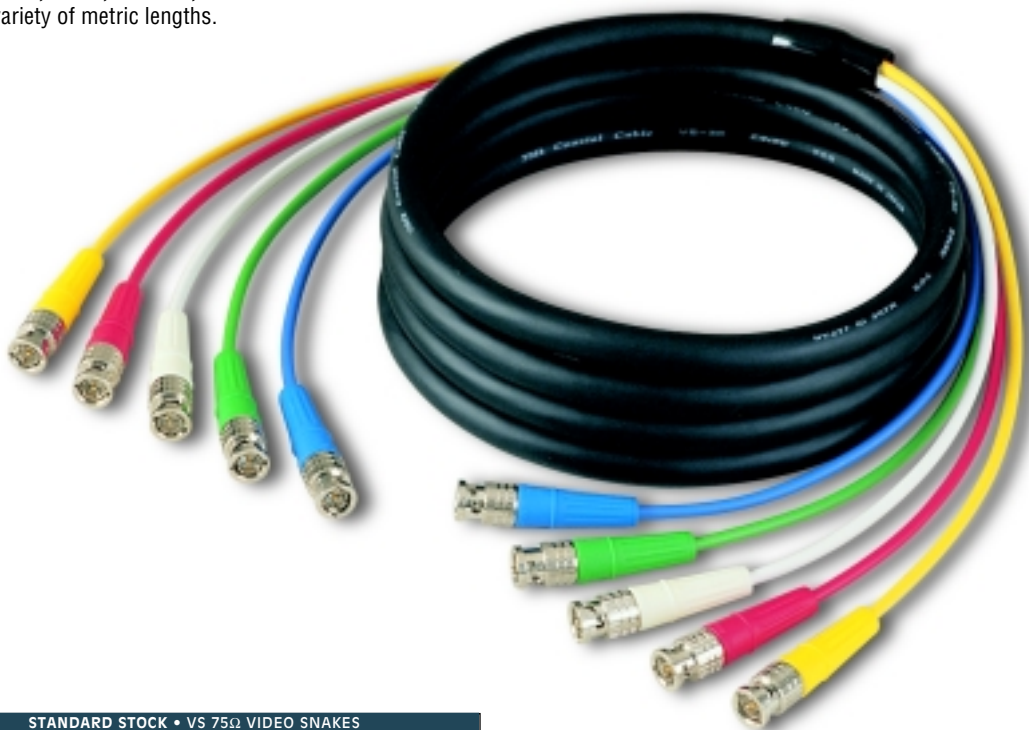

CABLE NOMINAL O.D.		
Model	inch	mm
V3-1.5C	.291	7.4
V4-1.5C	.331	8.4
V5-1.5C	.362	9.2
V3-3C	.453	11.5
V4-3C	.512	13.0
V5-3C	.559	14.2
V3-5C	.611	15.5
V4-5C	.674	17.1
V5-5C	.756	19.2
V3-3CFB	.453	11.5
V4-3CFB	.512	13.0
V5-3CFB	.559	14.2
V3-4CFB	.508	12.9
V4-4CFB	.567	14.4
V5-4CFB	.634	16.1
V3-5CFB	.673	17.1
V4-5CFB	.740	18.8
V5-5CFB	.831	21.1

STANDARD STOCK • VS 75Ω VIDEO SNAKES					
Model	Lng.	Number of Channels	75Ω Cable	75Ω BNC Plugs	Color Boot
3VS03-3C	9.8ft, 3m	3	V3-3C	BCP-C3B	CB03
3VS05-3C	16.4ft, 5m	RED, GRN, BLU	V3-3C		
4VS03-3C	9.8ft, 3m	4	V4-3C		
4VS05-3C	16.4ft, 5m	RED, GRN, BLUE, WHT	V4-3C		
5VS03-3C	9.8ft, 3m	5	V5-3C		
5VS05-3C	16.4ft, 5m	RED, GRN, BLUE, WHT, YEL	V5-3C		

NOMINAL ATTENUATION VALUE										
		1MHz	10MHz	50MHz	100MHz	200MHz	400MHz	700MHz	900MHz	1GHz
<b>V-1.5C</b>	dB/100 ft	0.9	2.9	6.5	9.3	13.1	18.5	24.5	27.8	29.3
	dB/100m	3.0	9.6	21.5	30.4	42.9	60.7	80.3	91.1	96.0
<b>V-3C</b>	dB/100 ft	0.5	1.5	3.2	4.7	6.7	9.4	12.5	14.2	14.9
	dB/100m	1.5	4.9	10.4	15.5	21.9	31.0	41.0	46.5	49.0
<b>V-5C</b>	dB/100 ft	0.3	1.0	2.4	3.3	4.6	6.6	8.6	9.8	10.4
	dB/100m	1.1	3.4	7.8	10.8	14.7	21.5	28.4	32.3	34.0
<b>V-3CFB</b>	dB/100 ft	0.3	1.0	2.5	3.3	4.5	6.5	8.8	10.1	10.6
	dB/100m	1.1	3.2	8.0	10.7	14.7	21.3	28.9	33.0	34.8
<b>V-4CFB</b>	dB/100 ft	0.3	0.9	2.0	2.7	3.8	5.4	7.3	8.4	8.9
	dB/100m	1.0	2.9	6.7	8.9	12.4	17.7	24.0	27.6	29.3
<b>V-5CFB</b>	dB/100 ft	0.3	0.7	1.6	2.2	3.0	4.3	6.0	6.8	7.2
	dB/100m	0.8	2.2	5.3	7.1	9.9	14.2	19.5	22.2	23.7

**Custom Model Selection Guide**

**4 VS 05 - 3C**

**Number of Channels**  
3, 4, 5

**Video Snake**  
VS = 75Ω BNC-BNC  
VF = BNC-F  
VR = BNC-RCA  
VC = F-RCA  
VP = F-F  
VH = RCA-RCA

**Length (meters)**  
3, 5, 8, 15, 30, 50

Other Custom Lengths are available

**V-Series Cable Type**  
1.5C  
3C  
5C  
3CFB  
4CFB  
5CFB